

Scheda tecnica / Data Sheet


PROFESSIONAL B1



Installazione / Installation Parete / Wall mounted	Filtro Grassi / Grease Filter Professional Baffle filter with liquid container
Versione / Version Aspirante * / Suction air *	Spessore Baffle filters / Baffle filters thickness 20 mm
Finitura / Finishing Acciaio / Steel	Pressione Efficienza Max / Max Efficiency Pressure 590 Pa
Comandi / Controls Tasti retroilluminati 3V+i ** / Backlit keys 3V+i **	Portata Massima IEC / Max Airflow IEC 788 m ³ /h
Alimentazione / Power supply 220-240 V -- 50 Hz	Portata Intensiva / Booster Airflow 802 m ³ /h
Motore / Motor Tangenziale / Tangential	Range Rumorosità / Noise Range 41 – 53 dB
Velocità temporizzata / Timed speed 15 min	Velocità intensiva / Temporized speed 4° vel. intensiva 6 min / 4° intensive speed 6 min
Allarme filtro grasso/ Grease filter alarm Dopo 30 h / After 30 h	Allarme filtro odori / Odor filter alarm Dopo 120 h / After 120 h
Illuminazione / Lighting	Assorbimento totale / Total Absorption
90 cm Led 2x2,1 W	120 cm Led 3x2,1 W
	90 cm 274,2 W
	120 cm 276,3 W

* Disponibile in versione Filtrante / Available in Recirculating version



** Disponibile con radio comando / Available with remote control

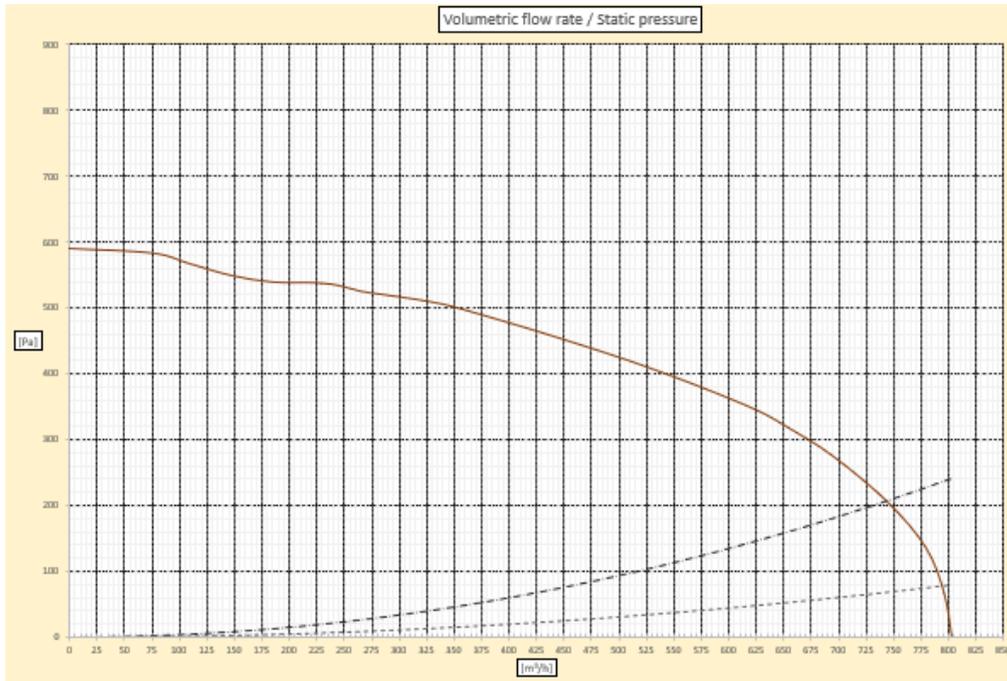

Modello / Model


PROFESSIONAL B1 90/A/Ix

PROFESSIONAL B1 120/A/Ix

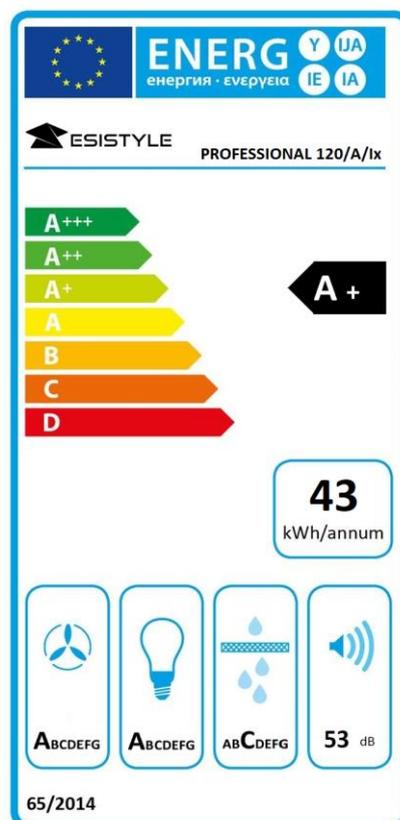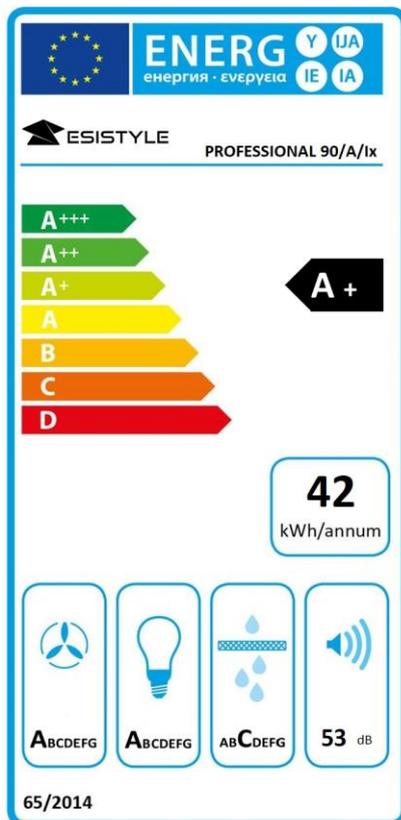

Misure e dimensioni / Measurements and dimensions

Dim. cappa / Hood dim.	90	120
Peso netto / Net weight	25,5 Kg	31 Kg
Peso lordo / Gross weight	33,5 Kg	40 Kg
Volume	0,357	0,463
Dim. imballo / Package dim.	100,4x56,4x63 cm	130,4x56,4x63 cm

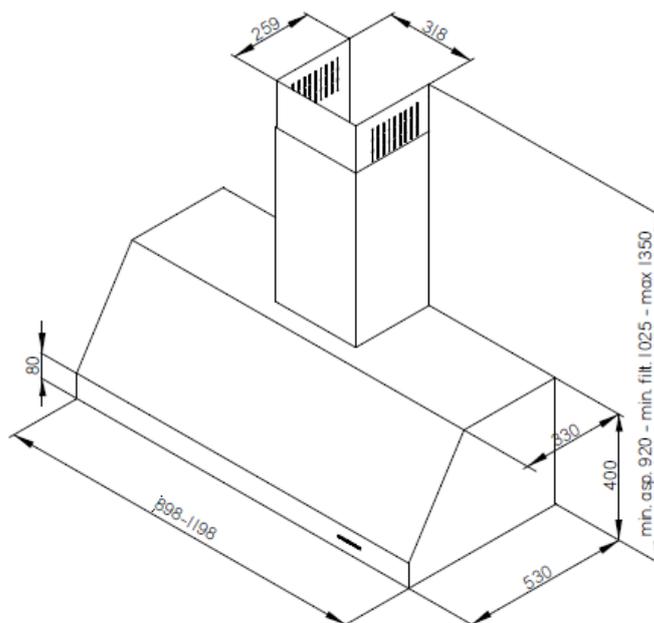

Accessori / Accessories

Kit filtrante Plasma / Plasma recycling kit

Codice / Code : E750000129



Kit filtrante carbone attivo / Carbon active recycling kit

Codice / Code : E750000003



Radio comando / Remote control

Codice / Code : E750000045

